

ULTRA SLIM TYPE DC SIGNAL ISOLATED TRANSMITTER

MODEL
SSTD



FEATURES

- Accuracy 0.1%F.S.
- Wide switchable select DC output ranges over 20 standard process signal
- Dielectric strength 1.5KVac/1 min.(input/output)
- Wide input range for auxiliary power
- Dimension small & High stability


1.MODEL:SSTD-□□□□

NO	Input Range	NO	Input Range	NO	Input Range	NO	Input Range	NO	Output Range	NO	Output Range	NO	Output Range	NO	Output Range	NO	Aux.Power
10	0~10mV	15	0~10V	20	0~1mA	25	0~100mA	A	0~0.5V	F	1~5V	J	0~1mA	O	0~16mA	A	DC20~60V
11	0~50mV	16	2~10V	21	0~10mA	26	0~200mA	B	0~1V	G	0~8V	K	0~2mA	P	0~20mA	B	AC/DC90~240V
12	0~1V	17	-10~+10V	22	0~20mA	27	0~2A	C	0~2V	H	0~10V	L	0~5mA	Q	4~20mA		• Less 0.8VA for AC/DC input
13	0~5V	18	0~100V	23	4~20mA	28	0~5A	D	0~4V	I	2~10V	M	1~5mA	R	SPECIFIED		
14	1~5V	19	0~200V	24	10~50mA	29	SPECIFID	E	0~5V			N	0~10mA				


2.SPCIFICATION

- Measuring accuracy : 0.1% F.S. (23±5°C)
- Input resistance : >100Mohm (<2V range)
>1Mohm (>2V range)
<10 ohm (mA input)
- Maximum input : <500Vrms (>2V ranges)
<150Vrms (<2V ranges)
<150mA (mA ranges)
- Response time : <250ms (0~90%)
- Output drive capability : <10mA for voltage mode
<10V for current mode
- Output ripple(p-p) : <0.1% F.S.
- Zero (offset) range : 0~±5% F.S.(VR adjustable)
- Span (scale) range : 0~±10% F.S.(VR adjustable)
- Temp. coefficient : 100ppm/°C (0~50°C)
- Isolation : Input/Output/Power/Case
- Insulation Resistance : >100M ohm with 500V DC
- Dielectric strength : 1.5KVac/1 min. (input/Output/power)
1200Vdc (input/Output1/Output2)
- Operating condition : 0~60°C (20 to 90% RH non-condensed)
- Storage condition : 0~70°C (20 to 90% RH non-condensed)
- Terminal type : M3 screw terminal
- Construction : 35mm DIN rail (EN50022)
- CE EMC Certification : EN 55022:1998/A1:2000 Class A
EN 61000-3-2:2000
EN 61000-3-3:1995/A1:2001
EN 55024:1998/A1:2001

3.TERMINAL CONNECTION

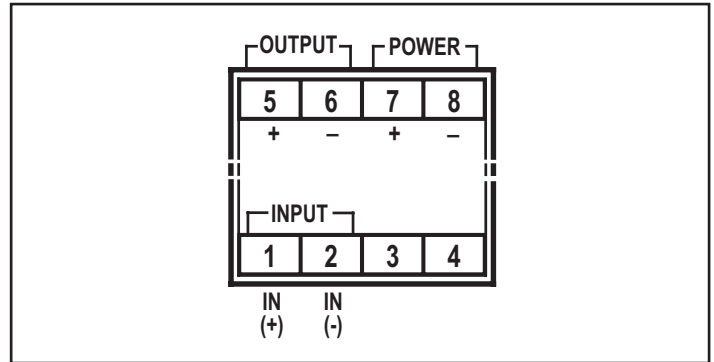

4.DIMENSION (unit:mm)

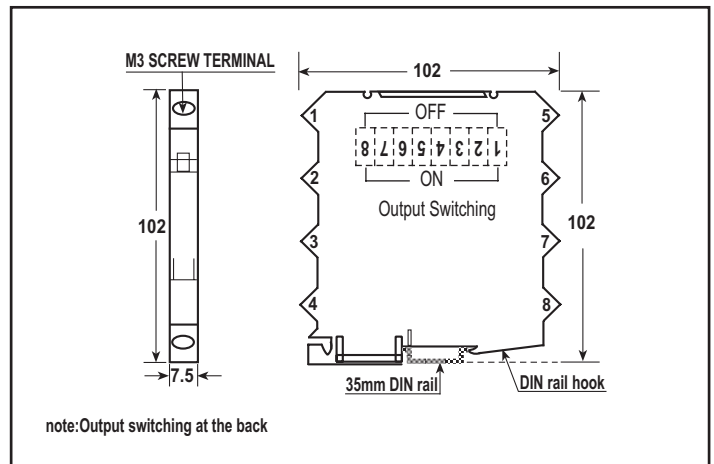

5.OUTPUT SWITCHING TABLE (switching status 1=on ; 0=off)

Output range	1-2-3-4-5-6	7-8	Output range	1-2-3-4-5-6	7-8
0~0.5V	0-1-1-1-1-0	1-1	0~1mA	0-1-1-1-1-0	0-0
0~1V	1-0-1-1-1-0	1-1	0~2mA	1-0-1-1-1-0	0-0
0~2V	1-1-0-1-1-0	1-1	0~5mA	0-1-0-1-1-0	0-0
0~4V	1-1-1-0-1-0	1-1	1~5mA	1-1-0-1-1-1	0-0
0~5V	1-0-1-0-1-0	1-1	0~10mA	1-0-1-0-1-0	0-0
1~5V	1-1-1-0-1-1	1-1	2~10mA	1-1-1-0-1-1	0-0
0~6V	1-1-0-0-1-0	1-1	0~16mA	1-1-1-1-0-0	0-0
0~8V	1-1-1-1-0-0	1-1	0~20mA	1-1-0-1-0-0	0-0
0~10V	1-1-0-1-0-0	1-1	4~20mA	1-1-1-1-0-1	0-0
2~10V	1-1-1-1-0-1	1-1			