

RESISTANCE ISOLATED TRANSMITTER

MODEL
TR



FEATURES

- Accuracy 0.1% F.S.
- Wide selection of input/output range
- Dielectric strength 2KVac/1 min.(input/output)
- Wide input range for auxiliary power
- Dimension small and High stability

1.MODEL:TR-□ □ □


NO	Input Range	NO	Input Range	NO	Input Range	NO	Output Range	NO	Output Range	NO	Output Range	NO	Aux. Power
1	0~100 ohm(<10mA)	4	0~2K ohm(<500uA)	7	0~100Kohm(<10uA)	A	0~50mV	E	2~10V	I	4~20mA	A	AC/DC 18~60V
2	0~500 ohm(<2mA)	5	0~5K ohm(<200uA)	9	SPECIFIED	B	0~1V	F	0~1mA	R	SPECIFIED	B	AC/DC 90~260V
3	0~1K ohm(<1mA)	6	0~10Kohm(<100uA)			C	1~5V	G	0~10mA			C	AC110V(50/60Hz)±20%
						D	0~10V	H	0~20mA			D	AC220V(50/60Hz)±20%

• Input Range(Sensor Current) • Less 3VA for AC/DC input

2.SPECIFICATION

- Measuring accuracy : 0.1% F.S. (23±5°C)
- Sensor exciting current : 0~100 ohm(<10mA)
0~500 ohm(<2mA)
0~1K ohm(<1mA)
0~2K ohm(<500uA)
0~5K ohm(<200uA)
0~10K ohm(<100uA)
0~100K ohm(<10uA)
- Response time : <250ms (0~90%)
- Output drive capability : <10mA for voltage mode
<10V for current mode
- Output ripple(p-p) : <0.1% F.S.
- Zero (offset) range : 0~±5% F.S.
- Span (scale) range : 0~±10% F.S.
- Temp. coefficient : 100ppm/°C (0~50°C)
- Isolation : Input/Output/Power/Case
- Insulation Resistance : >100M ohm with 500V DC
- Dielectric strength : 2KVac/1 min. (input/output/power)
1600Vdc (input/output)
- Operating condition : 0~60°C (20 to 90% RH non-condensed)
- Storage condition : 0~70°C (20 to 90% RH non-condensed)
- Construction : Socket/plugin type with barrier terminals
- CE EMC Certification : EN 55022:1998/A1:2000 Class A
EN 61000-3-2:2000
EN 61000-3-3:1995/A1:2001
EN 55024:1998/A1:2001

3.TERMINAL CONNECTION

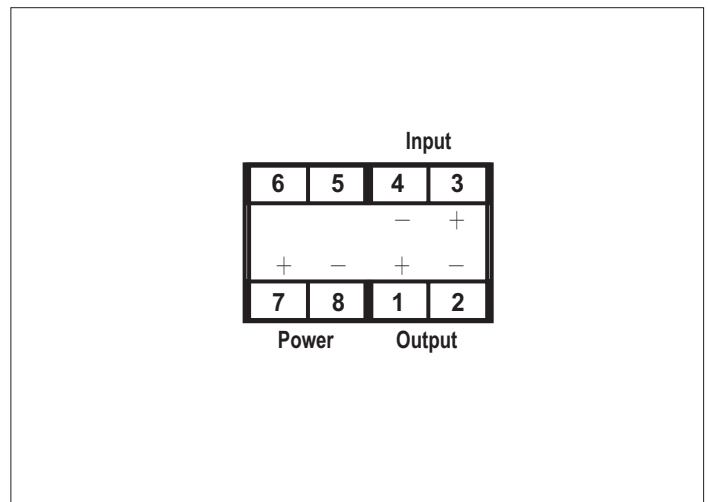

4.DIMENSION(unit:mm)

