

直流信號隔離雙輸出傳送器

(DUAL OUTPUT DC SIGNAL ISOLATED TRANSMITTER)

MODEL
DTD



特點(FEATURES)

精確度0.1%滿刻度 (Accuracy 0.1%F.S.)
 多種輸入與輸出選擇(Wide selection of input/output range)
 輸入與輸出絕緣耐壓2千伏特/1分鐘(Dielectric strength 2kVac/1 min. (input/output/power))
 寬範圍交直流兩用電源設計(Wide input range for auxiliary power)
 尺寸小,穩定性高(Dimension small and High stability)

1.MODEL:DTD-


(選購型號)

NO	Input Range	NO	Input Range	NO	Output 1 Range	NO	Output 2 Range	NO	Aux. Power
1	0-50mV	6	4-20mA	C	DC1-5V	C	DC1-5V	A	AC/DC 18-60V
2	0-1V	7	4-20mA	D	DC0-10V	D	DC0-10V	B	AC/DC 90-260V
3	0-5V	9	SPECIFIED	F	DC0-1mA	F	DC0-1mA	Less 4VA for AC/DC input	
4	1-5V	Exciting DC24V(<25mA) (two-wire transmitter)		I	DC4-20mA	I	DC4-20mA		
5	0-10V			R	SPECIFIED	R	SPECIFIED		

2.SPECIFICATION (主要規格)


Measuring accuracy (精確度)	: 0.1% F.S. (23 ± 5)
Input resistance (輸入阻抗)	: >100M ohm (<2V range) >1M ohm (>2V range) <10 ohm (current input)
Maximum input (最大過載能力)	: <300Vrms (>2V ranges) <150Vrms (<2V ranges) <150mA (current ranges)
Response time (輸出反應速度)	: < 250 ms (0-90%)
Output drive capability (輸出負載能力)	: < 10mA for voltage mode < 10V for current mode
Output ripple (p-p) (輸出之漣波)	: < 0.1% F.S.
Zero (offset) range (歸零調整範圍)	: 0- ± 5% F.S.
Span (scale) range (最大值調整範圍)	: 0- ± 10% F.S.
Temp. coefficient (溫度係數)	: 100ppm/ (0-50)
Isolation (隔離特性)	: Input/Output 1/Output 2/Power/Case
Insulation Resistance (絕緣阻抗)	: >100M ohm with 500V DC
Dielectric strength (絕緣耐壓能力)	: 2kVac/1 min. (input/output 1/output 2/power) 1600Vdc (input/output 1/output 2)
Operating condition (使用環境條件)	: 0-50 (20 to 90% RH non-condensed)
Storage condition (存放環境條件)	: 0-70 (20 to 90% RH non-condensed)
Construction (安裝方式)	: Socket/plugin type with barrier terminals

3.Terminal connection(接線圖)



note:Exciting voltage DC24V existent "DTD-7" only

4.Dimension(unit:mm)(外型尺寸)

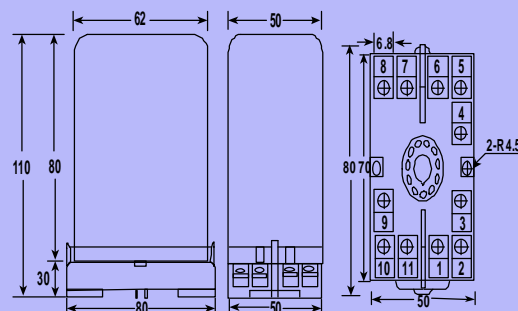

AXE TECHNOLOGY CO.,LTD.

Address:NO.70.Lane 83,Hwa Chen Road

Hsing Chung City,Taipei Hsien,Taiwan,R.O.C

TEL :886-2-2276-3475

FAX :886-2-2276-3479

E-mail :axe168.mail@msa.hinet.net

http :/www.axe168.com.tw